

SUNRISE SHARES ENERGY

Powered by Sunrise

PROPOSAL – INTA BINA (RIMBAYU CLQ)

ENERGY SAVING SOLAR ROOFTOP SYSTEM WITH BESS

SUNRISE SHARES ENERGY SDN BHD
(A Member of Sunrise Shares Holdings Ltd)

OUR COMPANY

SUNRISE SHARES ENERGY
Powered by Sunrise

- **SUNRISE SHARES ENERGY SDN BHD** ("SSE") is a related company of Sunrise Shares Holdings Ltd, a listed company in Singapore.

- SSE Group are dedicated to driving the global transition toward **sustainable and clean energy solutions** with the principles of harnessing **renewable energy sources** to meet the world's growing energy demands while preserving the planet for future generations.

- SSE Group is an **investor** and turnkey solution provider which includes Engineering, Procurement, Construction and Commissioning (EPCC) for:
  - ✓ **Solar System** (Rooftop & Farm)
  - ✓ **Solar Street Light** (SSL),
  - ✓ **BESS - Sustainable Genset** (Replacing Genset)
  - ✓ **BESS - Peak Shaving** (Energy Storage and Reduce Maximum Demand)

- SSE Group is backboned by a team of **skilled professionals** and **cutting-edge technology**, we ensure reliable, efficient, and scalable energy solutions that align with your sustainability goals.

- Our mission is to **reduce global carbon emissions** and promote energy independence through **cost-effective** and environmentally friendly alternatives.

- SSE Group is an investor which provides **Project Funding** in various long-term concession investments related to Renewable Energy (RE).

OUR BUSINESS SEGMENTS

SUNRISE SHARES ENERGY
Powered by Sunrise



Solar Rooftop
(Commercial & Industrial)



Solar Farm
(Large Scale Solar)




Street Lighting
(Solar Street Light)



MegaBatt
(Sustainable Genset)



MegaBatt
(Energy Storage System)

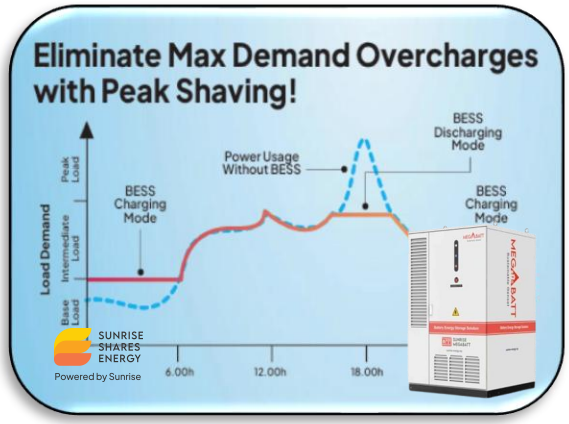

Megabatt
(Peak Shaving)

OUR CERTIFICATIONS

SUNRISE SHARES ENERGY
Powered by Sunrise


KEMENTERIAN KEWANGAN MALAYSIA
SIJIL AKUAN PENDAFTARAN SYARIKAT


Registered RE Supplier with MOF


CIDB MALAYSIA
PERAKUAN PENDAFTARAN

Registered G7 Contractor with CIDB


BORANG Q
(peraturan 75)
AKTA BEKALAN ELEKTRIK 1990
PERAKUAN PENDAFTARAN SEBAGAI KONTRAKTOR ELEKTRIK

Registered Electrical Contractor with ST

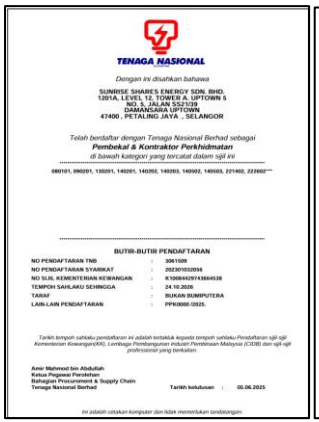
TENAGA NASIONAL
Dengan ini disahkan bahawa
SUNRISE SHARES ENERGY SDN. BHD.
BUTIR-BUTIR PENDAFTARAN

Registered Vendor with TNB


PERAKUAN PENDAFTARAN
PEMBEKAL PERKHIDMATAN FOTOVOLTA SURIA BERDAFTAR
REGISTERED PHOTOVOLTAIC SERVICE PROVIDER
SEDA-RPVSP-2025/353

Registered Solar Service Provider (RPVSP) with SEDA


PERAKUAN PENDAFTARAN
PELABUR SOLAR PV BERDAFTAR DI BAWAH PROGRAM NEM
REGISTERED SOLAR PHOTOVOLTAIC INVESTOR UNDER NEM PROGRAMME
SEDA-RPVI-2024/232

Registered Solar PV Investor (RPVI) with SEDA

CERTIFIED ISO 9001 CERTIFIED

SIRIM QAS INTERNATIONAL

GCL INTERNATIONAL ISO 9001 | UKAS MANAGEMENT SYSTEMS 5965

JKR

MGTC

Registered for Kod Bidang Teknologi Hijau

MALAYSIA MyHIJAU

Submitted – Pending Approval

SIRIM

MEGABATT (Approved)

MyIPO

Registered for "MEGABATT"

OUR SERVICES – SOLAR PV

SUNRISE SHARES ENERGY
Powered by Sunrise

- SSE Group provide complete range of engineering skills such as design, project planning & management, financial modelling, construction management and commissioning including **Project Funding** for Solar system.

- Our experienced engineering team is capable to provide you a **customized design and proven cost-effective** Solar system that meet your demands.

- SSE Group offer only top (Tier 1) and **proven Solar Equipment** for Solar Panel, Inverter, Mounting Structure, Junction Box, Cabling etc. which complied with all the Industry Standards.

- Our team have experience completed various Solar projects under different program including **FiT, NEM, SELCO, LSS, CGPP and CRESS.**

- SSE Group specializes in providing comprehensive long-term solar **operations and maintenance** (O&M) solutions to ensure optimum performance of the Solar system.



PROJECT REFERENCES – SOLAR ROOFTOP

SUNRISE SHARES ENERGY
Powered by Sunrise



Rooftop Solar (Manufacturing) – 6MWp (Selangor)



Rooftop Solar (Chicken Poultry) – 1MWp (N.Sembilan)



Rooftop Solar (Warehouse) – 1MWp (P.Pinang)



Rooftop Solar (Petronas) – 625kWp (Selangor)

PROJECT REFERENCES – SOLAR BIPV

SUNRISE SHARES ENERGY
Powered by Sunrise



Rooftop Solar (Mushroom Farm) – 1MWp (N.Sembilan)



Rooftop Solar (Mushroom Farm) – 425kWp (N.Sembilan)



Rooftop Solar (Fish Farm) – 1MWp (N. Sembilan)



Rooftop Solar (Fish Farm) – 425kWp (N.Sembilan)

PROJECT REFERENCES – SOLAR FARM

SUNRISE SHARES ENERGY
Powered by Sunrise



Solar Farm – 60MWp (N.Sembilan)



Solar Farm – 500kWp (N.Sembilan)



Solar Farm – 45MWp (Kedah)



Solar Farm – 36MWp (Johor)

OUR ESTEEMED CUSTOMERS

SUNRISE SHARES ENERGY
Powered by Sunrise

TAGHILL

TIONG NAM

NESTCON

SLG CONSTRUCTION

YTL Construction
YTL GROUP

KSSB
KUMPULAN SEMESTA

YONG TAI
永大集团

TIGASFERA

HAB CONSTRUCTION SDN. BHD.

EXSIM
NEW AGE INGENUITY

MARRIOTT

GOVI
ENGINEERED CHEMICALS

NORTHERN SOLAR

SAMAIDEN

MDGM

MPKJ

intaBINA
Your Partner In Construction

ADVANCECON

ILM LOGISTICS

ARROW ELECTRONICS, INC.

TECHNICAL PROPOSAL

SUNRISE SHARES ENERGY

Powered by Sunrise

PROPOSED LAYOUT (PRE-LIM)
SOLAR ROOFTOP SYSTEM

SUNRISE SHARES ENERGY
Powered by Sunrise



Proposed Rooftop Solar & BESS System Summary			
ST Scheme	Off Grid	**Proposed Solar Capacity & Quantity**	169.88kWp / 274 Pcs
Proposed BESS	130kW/261kWh*2 Units	**Proposed Inverter**	125kWac
Advantages	ESG - Significant Savings on Operation Cost (> 40%), no more Diesel		

PROPOSED PV PANELS
SOLAR ROOFTOP SYSTEM

SUNRISE SHARES ENERGY
Powered by Sunrise

Solar JinKO

TiGER Neo

66HL4M-(V)

610-635 Watt

MONO-FACIAL MODULE

N-type



N-type Technology

N-type modules with Tunnel Oxide Passivating Contacts (TOPcon) technology offer lower LID/LeTID degradation and better low light performance.

HOT 3.0 Technology

N-type modules with JinkoSolar's HOT 3.0 technology offer better reliability and efficiency.

Durability Against Extreme Environment

High salt mist and ammonia resistance.

Mechanical Load Enhanced

Certified to withstand:
5400 Pa front side max static test load
2400 Pa rear side max static test load

SMBB Technology

Better light trapping and current collection to improve module power output and reliability.

Anti-PID guarantee

Minimizes the chance of degradation caused by PID phenomena through optimization of cell production technology and material control.

PROPOSED PV PANELS
SOLAR ROOFTOP SYSTEM

SUNRISE SHARES ENERGY
Powered by Sunrise

Mechanical Characteristics

Cell Type	N -type Mono-crystalline
No. of cells	132 (66×2)
Dimensions	2382×1134×35 mm
Weight	28.2 kg
Front Glass	3.2mm, Anti-reflection Coating, High Transmission, Low Iron, Tempered Glass
Frame	Anodized Aluminium Alloy
Junction Box	IP68 Rated
Protection Class	Class II
IEC Fire Type	Class C
Connector Type	JK03M/MC4/Others
Output Cables	4.0 mm² (+): 400 mm , (-): 200 mm or Customized Length

Packaging Configuration

Pallet Dimensions	2396×1110×1251 mm
Packing detail (Two pallets=One stack)	31 pcs/pallets, 62 pcs/stack, 620 pcs/ 40'HQ Container

Specifications (STC)


Maximum Power – Pmax [Wp]	610	615	620	625	630	635
Maximum Power Voltage – Vmp [V]	40.56	40.73	40.90	41.07	41.23	41.39
Maximum Power Current – Imp [A]	15.04	15.10	15.16	15.22	15.28	15.34
Open-circuit Voltage – Voc [V]	48.63	48.79	48.95	49.11	49.27	49.43
Short-circuit Current – Isc [A]	16.01	16.08	16.15	16.22	16.29	16.36
Module Efficiency STC [%]	22.58	22.77	22.95	23.14	23.32	23.51
Power Tolerance	0 ~ + 3 %					
Temperature Coefficients of Pmax	-0.29 %/°C					
Temperature Coefficients of Voc	-0.25 %/°C					
Temperature Coefficients of Isc	0.045 %/°C					

STC: Irradiance 1000W/m², Cell Temperature 25°C, AM=1.5

Application Conditions


Operating Temperature	-40 °C ~ +70°C
Maximum System Voltage	1000/1500 VDC (IEC)
Maximum Series Fuse Rating	30 A


Engineering Drawings

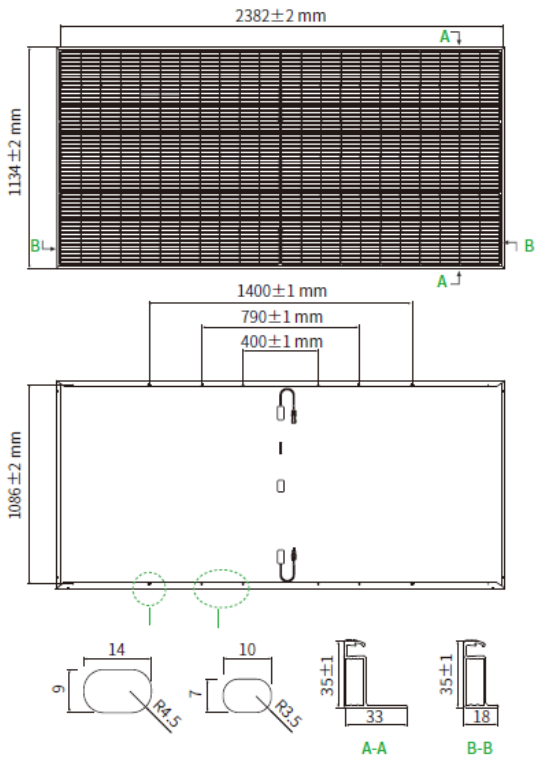

*Note: For specific dimensions and tolerance ranges, please refer to the corresponding detailed module drawings.

Electrical Performa...

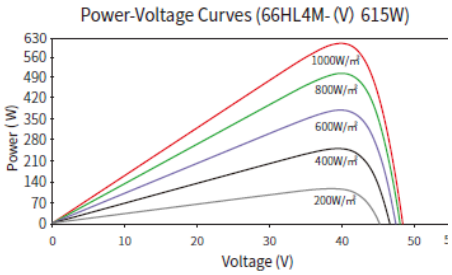

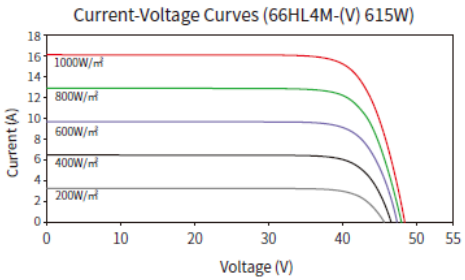

PROPOSED INVERTER SOLAR ROOFTOP SYSTEM

SUNRISE SHARES ENERGY
Powered by Sunrise




- 10 MPPTs, max. efficiency 99.0%
- Night SVG function
- DC side supports "Y" connector
- Power line communication (PLC) (optional)
- AFCI protection, proactively reduces fire risk
- Globally recognised branded componentry for longer life
- String current up to 16A, perfectly match large current bifacial modules
- > 150% DC/AC ratio
- Type I SPD for AC (optional)
- High power tracking density 100MPPT/MW
- Remote firmware upgrade with simple operation
- Intelligent string monitoring, smart I-V curve scan
- Built-in PID recovery for better module performance (optional)
- Overvoltage load reduction and leakage current suppression technology, low failure rate

PROPOSED INVERTER SOLAR ROOFTOP SYSTEM

SUNRISE SHARES ENERGY
Powered by Sunrise



Intelligent Monitoring Solution - SolisCloud

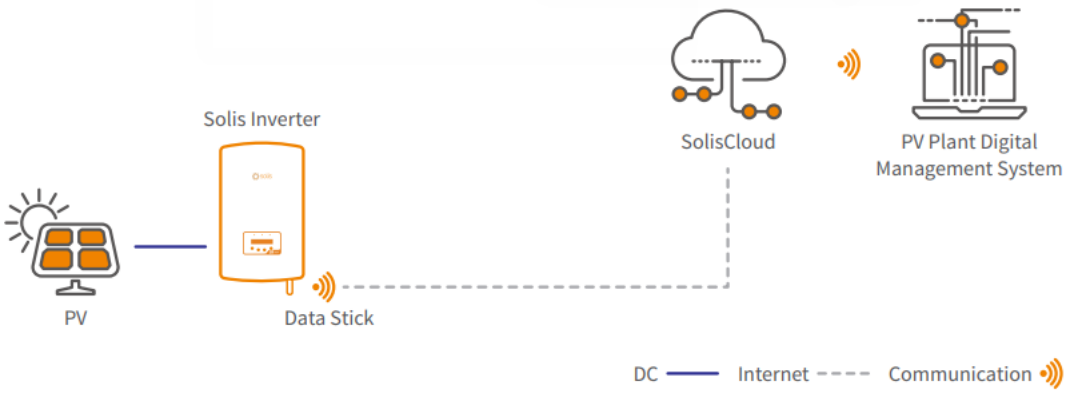

Advanced Cloud Platform

- Connecting with multiple types of devices seamlessly: Inverters, export power managers, weather stations, etc.

Efficient O&M

- Smart I-V curve scan, system health report, string-level fault finding.

Multiple Plant Management


- Manage multiple types of systems across residential, commercial and utility scale plants. Enables multiple team management across different sectors.


Full Screen Display Mode

- Clear and concise display of system performance and benefits including carbon emissions saved and equivalent trees planted as well as showing system yield & earnings.

PROPOSED MOUNTING STRUCTURE
SOLAR ROOFTOP SYSTEM

SUNRISE SHARES ENERGY
Powered by Sunrise

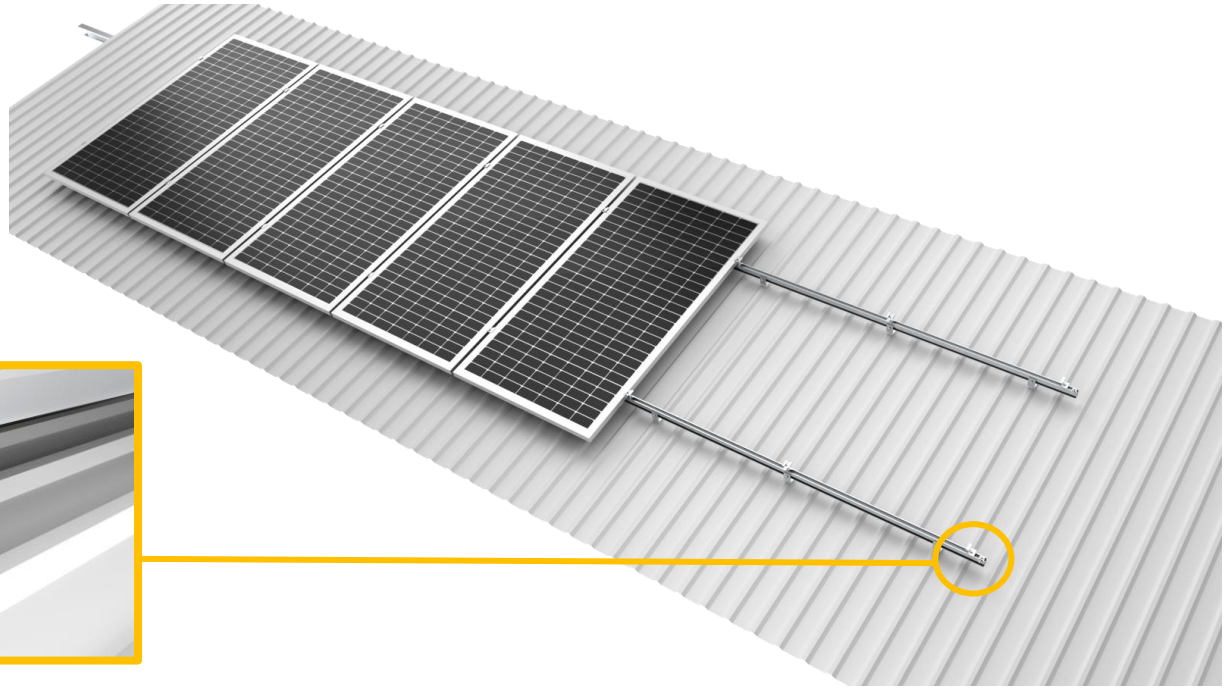

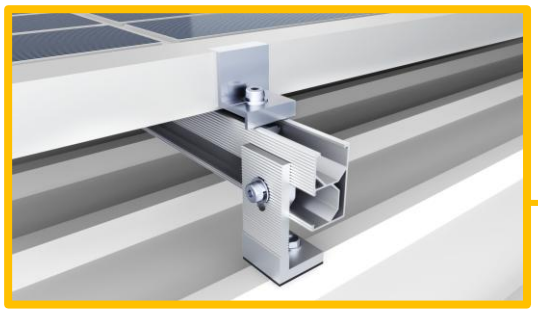



L Bracket



Mid Clamp



Rail Splice




Rail



Grounding Lug Kit (Optional)



Grounding Clip (Optional)



Cable Clip (Optional)

OUR PRODUCTS – MEGABATT - BESS FOR ENERGY STORAGE

SUNRISE SHARES ENERGY
Powered by Sunrise





MEGABATT – M SIZE		
BESS Capacity	**130kW / 261kWh**	
Rated Current	188A	
Battery Cell	314Ah	
Battery Type	LiFePO4 (LFP)	
Cooling Method	Liquid Cooling	
Number of Cycles	> 8,000 cycles	
Dimension (WxDxH)	1375 x 1350 x 2150 mm	
Net Weight (kg)	+/- 2,600	
IP Rating	IP54	
Specification Summary	• Indoor/Outdoor Cabinet • Fire Protection System • Remote Monitoring System	• Energy Management System (EMS) • Battery Management System (BMS) • Battery Warranty 10 years

COMMERCIAL PROPOSAL

SUNRISE SHARES ENERGY

Powered by Sunrise

Client's Requirements

SUNRISE SHARES ENERGY
Powered by Sunrise

Client's Requirements													
No.	Load	Capacity (kVA)	Peak Current	Peak Power	Running Current	Running Power	Usage Factor			Operation Time	Total Peak Power	Total Peak Current	Total Usage
							Actual	Average	Avg. Int Power				
			Amp	kW	Amp	kW	%	%	kW	Hours	kW	Amp	kWh
1	CLQ	75	87	60	69	48	50%	50%	24	14	60	87	336
		TOTAL	87	60	69	48		50%	24	14	60	87	336

Current Operation Site:

- There is **no TNB** power supply at current site.
- Client is leveraging **2 units of genset (25kVa + 50kVa**) for hostel usage.
- Monthly diesel consumption is around **4,500 liters for these 2 gensets.**
- We are proposing to **use Solar system as charging source to the MEGABATT and replace diesel genset** while complying with **ESG and Savings** on Operation Costs.
- **Hostel Intermittent Power Usage** estimated to be at 50% and Total Intermittent Power Usage is **336kWh.**
- Above table are the equipment used and to be used at current site which required up to **87A** load usage and Hostel Operation Hours required of **14 hours per day.**

OUR PROPOSAL
- Total Savings (10 years)

SUNRISE SHARES ENERGY
Powered by Sunrise

*solar capacity might change after site visit

Our Proposal															
Solar				MegaBatt			Design Check				DG Incoming		BESS Operation Hours Sustainability	Charging Time	
Usage	Auto-Days	PSH	Propose PV Capacity	BESS Output	BESS Capacity	Output Current	Peak Power	Pass (Y) No (N)	Peak Current	Pass (Y) No (N)	Genset Rating	Power		Min	Max
kWH	days	h	kWp	kW	kWh	Amp	kW		Amp		kVA	kW	Hours	Hours	Hours
336	1	3.6	170	260	522	375	60	Y	87	Y	0	0	14	3	5
			170		TOTAL	375				TNB Incoming:	0	0			

Staggered Start-up of equipment:

Total System Cost				Per Month	For 10 years
Hire Purchase of BESS	5 years @ 3.5%	Amort 10 years	2 units	4,700	564,000
Solar System cost	169.88 kWp	Amort 10 years		2,690	322,772
				7,390	886,772

Current operation running fully off-grid:

Total Cost for Genset					Per Month	For 10 years
Rental of Genset		25kVA	1 unit(s)	900	900	108,000
Rental of Genset		50kVA	1 unit(s)	1,200	1,200	144,000
Diesel usage (25kVA)	3.7 liters/hour	14 hours	1 unit(s)	4.72	7,335	880,186
Diesel usage (50kVA)	7.2 liters/hour	14 hours	1 unit(s)	4.72	14,273	1,712,794
					23,708	2,844,979

TOTAL SAVINGS	16,318	1,958,207
	69%	69%
PAYBACK (Years)	4.1	4.1

Using BESS at CLQ Site:

- Total CAPEX for **MegaBatt 130kW/261kWh x 2 units = RM480,000.00**
- Hire Purchase for 2 units of **MegaBatt (Tenure: 5 years)** is **RM9,400 per month.**
- Total CAPEX for **Solar system (169.88kWp) = RM322,000.00**
- Total Savings of **69%** on Operation Cost (RM16,318 per month and RM1,958,207 for 10 years).
- Payback Period for purchase of the **MegaBatt + Solar** proposed from the total savings is **4.1 years**.

FINANCIAL HIGHLIGHTS
PAYMENT TERMS

SUNRISE SHARES ENERGY
Powered by Sunrise

Description (Payment Terms)		(RM)
Milestone 1	30% downpayment Upon PO Issuance	**240,600.00**
Milestone 2	50% before ship out from origin country/factory	**401,000.00**
Milestone 3	20% Upon Test & Commissioning Completion	**160,400.00**
TOTAL		**802,000.00**

OUR PROPOSAL
- Summary (Using Solar + MegaBatt)

SUNRISE SHARES ENERGY
Powered by Sunrise



Solar Rooftop



MEGABATT 130kW/261kWh
x 2 units



CLQ

WARRANTY

SUNRISE
SHARES
ENERGY

Powered by Sunrise

WARRANTY HIGHLIGHTS
SOLAR ROOFTOP SYSTEM

SUNRISE SHARES ENERGY
Powered by Sunrise

Item	Warranty Coverage
Solar PV Module	**12 Years** Manufacturing Warranty **30 Years** 80% Performance Warranty
PV Inverter	**10 Years** Product Warranty
Mounting Structure	**15 Years** Product Warranty
BESS	**10 Years** Product Warranty
Defect Liability Period	**1 Year** Workmanship Warranty from Project Completion Signed Off Commencement Date *Inclusive Charges of Electrical Item & Labor and Travelling Cost for Changes of Part, Excluding Any Act of Nature, Securities Issues, Vandalism or Inappropriate Care of the Perform Material or Works.
O & M	Free **1** time

Warranty is VOID if: -

- The equipment is not kept in the environment as stipulated in the O&M Manual.
- Deliberate damage to the system
- Improper operation
- Unauthorized attempts to repair/maintenance
- Force Majeure, including but not limited to earthquakes, thunderstorm, acts of vandalism, network over voltage and power surges, fire and any other event beyond the control of SSE.
- Relocation of equipment without the supervision of SSE.
- Any other reasons attribute to client.

WARRANTY HIGHLIGHTS
OPERATION & MAINTENANCE

SUNRISE SHARES ENERGY
Powered by Sunrise

Sunrise Shares Energy's is pleased to offer complimentary Operations and Maintenance (O&M) services for the initial 1 time to our valued customers. Additionally, we provide tailored O&M packages for subsequent years to ensure the continued efficiency and longevity of your solar PV system. Please refer to the table below for details on our customizable O&M packages.

O&M	Costing [RM/kWp]
Yearly Charges	30.00

Task	Description
Daily Monitoring	Continuous monitoring of solar PV system performance, tracking daily energy yield, and detecting faults.
Annual Preventive Maintenance	Comprehensive inspection of all hardware and components to ensure optimal functionality.
Preventive Maintenance	Scheduled maintenance activities to address identified issues and prevent future malfunctions.
Emergency Corrective Action	Swift response to any malfunctions or anomalies detected, ensuring minimal downtime.

WARRANTY HIGHLIGHTS
OPERATION & MAINTENANCE

SUNRISE SHARES ENERGY
Powered by Sunrise

Sunrise Shares Energy's O&M services are designed to maximize the efficiency, safety, and reliability of your solar PV system, providing you with peace of mind and ensuring maximum return on investment.

Category	Equip.	Type	Description
Daily Monitoring[11]	Logger	Remote	Observe the daily generation of solar energy yield[11]
			Pinpoint the critical faults[11]
Annual Preventive Inspection & Maintenance[6]	Logger	Ground	Inspect functionality & connectivity
			Read event logs, resolve warnings/alarms & adjust settings
	PV Module	Ground	Clean module surface if necessary[9]
		Roof[5]	Inspect overall appearance & identify non-construction defects
			Identify additional shading areas[10]
	Inverter	Ground	Read event logs, resolve warnings/alarms & adjust settings
			Clean air inlet, cooling fan & heat sink
			Inspect overall appearance, performance & functionality
	PV Mount	Roof[5]	Inspect the integrity of the mounting system for damage
	DC & AC	Ground	Perform insulation resistance tests on DC & AC wires if necessary[6]
			Inspect functionality of DC & AC protective devices[8]
		Ground/ Roof[5]	Inspect integrity of wires, connectors, concealed inlets & outlets for damage & loose connections
			Diagnose, troubleshoot, report & restore system[1]
Emergency Corrective Action[5]	Service	Ground/ Roof[5]	Repair & replace electrical parts[4,14]
			Assist in administration of standard/extended warranty claims

WARRANTY HIGHLIGHTS
OPERATION & MAINTENANCE

SUNRISE SHARES ENERGY
Powered by Sunrise

Terms & Conditions:

1. The Client must promptly inform the Principal Service Provider of any abnormal conditions occurring within the system.
2. The Client is prohibited from causing damage due to negligence, abuse, misuse, modification, tampering, alteration, relocation, reinstallation, or adjustment of the existing system without authorization from the Principal Service Provider. Such actions may void standard/extended warranties or result in system malfunctions.
3. Force majeure events affecting the solar PV system, such as war, crime, natural disasters, natural phenomena, vandalism, or intentional damage, are not covered by the Service Provider or Manufacturer.
4. Consumables and wear & tear parts on the DC or AC side, including inverters and switchboards as declared by the Manufacturer, are the responsibility of the Client. The Service Provider may offer free replacement or exchange services for affected components during the maintenance period, with outstation transportation costs borne by the Client.
5. Drones will primarily conduct roof inspections, and any expenses incurred for the engagement of machinery or specialized equipment for roof access upon request are the responsibility of the Client.
6. Power supply to the solar PV and/or main power system(s) may be temporarily interrupted during the maintenance period with the consent of the Client. The Client is responsible for ensuring that all appliances are individually switched off in a safe and proper manner to prevent damage.
7. The standard workmanship warranty or defect liability period (DLP) is 1 year for residential projects and 2 years for commercial & industrial projects, unless otherwise mentioned, subject to clause (2).
8. The functionality of connectors and cables is guaranteed for 2 years, subject to clause (2).
9. The Client is responsible for providing power and water for cleaning PV modules. The use of special water-based cleaners may incur additional costs.
10. Any additional objects causing shading of the module irradiance zone, whether permanent or temporary, are the responsibility of the Client. The Service Provider will notify the Client of any obstructions during preventive inspection and maintenance.
11. The Client must ensure a reliable wired/wireless network connection for the online remote monitoring system.
12. The Service Provider offers a complimentary maintenance period for system operation only, excluding the extension of standard product warranties from the Manufacturer.
13. Clients have the option to purchase insurance premiums for extensive coverage against pure risk.
14. Repair/replacement parts are subject to market availability and lead times provided by the Manufacturer and Supplier.
15. Wooden roof structures, if present, must be protected from termite attacks through proper and regular pest control measures (by a third party) throughout the lifespan of PV modules/buildings.



SUNRISE
SHARES
ENERGY
Powered by Sunrise
SOLAR STREET LIGHT
(Compound Lighting)
EVERGREEN

OUR PROPOSAL
ECO SSL – Intelligent Solar Lighting System


SUNRISE SHARES ENERGY
Powered by Sunrise


LED Type	Lamp Power	60W
	Efficiency	210-220Lm/W
	Size	L620 x W248 x H130mm
	CCT	6000-6500K
	CRI	> 75
LiFePO4 Lithium Battery	Capacity	150AH 3.2V
	Lifespan	25 Years Solar Panel / 15 years LED / 10 Years battery & Controller
	Working Temperature	-10 to 60 Degree Celsius
Controller	Charge Time	40 to 60w PWM, 4 - 6 hours
	Lighting	Whole night (12 hours) with up to 3 days Autonomy
	Mode	Time Control / Light Dimming Control / MW Sensor control
Solar Panel	Power	80w 5054,
	Voltage	DC 12V
	Efficiency	>19%
Microwave Sensor		Optional
Material of casing		Aluminium Alloy
Smart Control		Smart IOT nema controller for Real Time Solar lights monitoring (optional)
IP ratings		IP65
Pole Height		6m

Product Dimension :



Product Illuminations :









Item	Quantity (Units)	Unit Price (RM)	Total Price(RM)
SSE Eco-SSL Solar Street Lighting 60W comes with 6M pole, footing and installation (2 years warranty)	1	3,400.00	3,400.00

SUNRISE SHARES ENERGY

Powered by Sunrise

LEADER IN SOLAR ROOFTOP TECHNOLOGY

Sunrise Shares Energy Sdn. Bhd. (1525979-K)
Unit 1201A, Level 12, Tower A, Uptown 5,
No. 5, Jalan SS21/39, Damansara Uptown,
47400 Petaling Jaya, Selangor, Malaysia.
P:+603-7732 1144
www.sunrise-energy.my