OUR UNDERSTANDING
- Client's Requirements

SUNRISE SHARES ENERGY
Powered by Sunrise

Client's Requirements														
No.	Load	Genset Size (kVA)	Peak Current	Peak Power	Running Current	Running Power	Usage Factor			Operation Time	Total Peak Power	Total Peak Current	Total Usage
							Actual	Average	Avg. Int Power				
			Amp	kW	Amp	kW	%	%	kW	Hours	kW	Amp	kWh
1	1.5Hp Air Cond 2 x Unit		13.33	3.20	10.67	2.56	80%	80%	2.05	12	3.20	13.33	24.58
2	Lighting Point 6 x Unit (10W LED)		0.50	0.12	0.40	0.10	80%	80%	0.08	12	0.12	0.50	0.92
3	Laptop 6 x Unit		0.11	0.03	0.08	0.02	60%	60%	0.01	12	0.03	0.11	0.15
4	Phone Charge 6 x Unit		0.25	0.06	0.20	0.05	50%	50%	0.02	12	0.06	0.25	0.29
		TOTAL	**14**	**3**	**11**	**3**		**68%**	**2**	**12**	**3**	**14**	**26**

OUR PROPOSAL
- Total Savings (10 years)

SUNRISE SHARES ENERGY
Powered by Sunrise

Our Proposal																
Solar						MegaBatt			Design Check				Backup Genset		BESS Operation Hours Sustainability	Charge Time	
sage	Auto-Days	PSH	Propose PV Capacity	Area Needed		BESS Output	BESS Capacity	Output Current	Peak Power	Pass (Y) No (N)	Peak Current	Pass (Y) No (N)	Genset Rating	Rated Power		Min	Max
kWH	days	h	kWp	m²	acres	kW	kWh	Amp	kW		Amp		kVA	kW	Hours	Hours	Hours
26	1	3.6	17.50	151	0.04	14	15.36	58	3	Y	13	Y	50	40	12	3	5
			17.50	**151**	**0.04**		**TOTAL**	**58**					**50**	**40**			

Using BESS+Solar for operation:

Total Cost for BESS				Per Month	For 10 years
Hire Purchase of BESS	5 years @ 3.5%	Warranty 10 years	3 unit(s)	154	18,426
Solar System cost	17.50 kWp	Amort 20 years	1 unit(s)	190	22,750
				343	41,176

Current operation using Gensets:

Total Cost for Genset					Per Month	For 10 years
Rental of Genset		50kVA	1 unit(s)	1,000	1,000	120,000
Diesel usage (50kVA)	1.66 liters/hour	12 hours	1 unit(s)	4.42	2,641	316,967
					3,641	436,967


TOTAL SAVINGS	**3,298**	**395,791**
	91%	91%
PAYBACK (Years)	1.5	1.5

Using Solar + BESS at Site:

- Total CAPEX for **MegaBatt 5.12kWh x 3 units = RM16,000.00.**
- Total CAPEX for **Solar System (17.50kWp) = RM45,500.00.**
- Total Savings of **91%** on Operation Cost (RM3,298 per month and RM395,791 for 10 years)
- Payback Period for purchase of the **MegaBatt** proposed from the total savings is **1.5 years**.

OUR PROPOSAL
- Summary (Using Solar + MegaBatt)

SUNRISE SHARES ENERGY
Powered by Sunrise

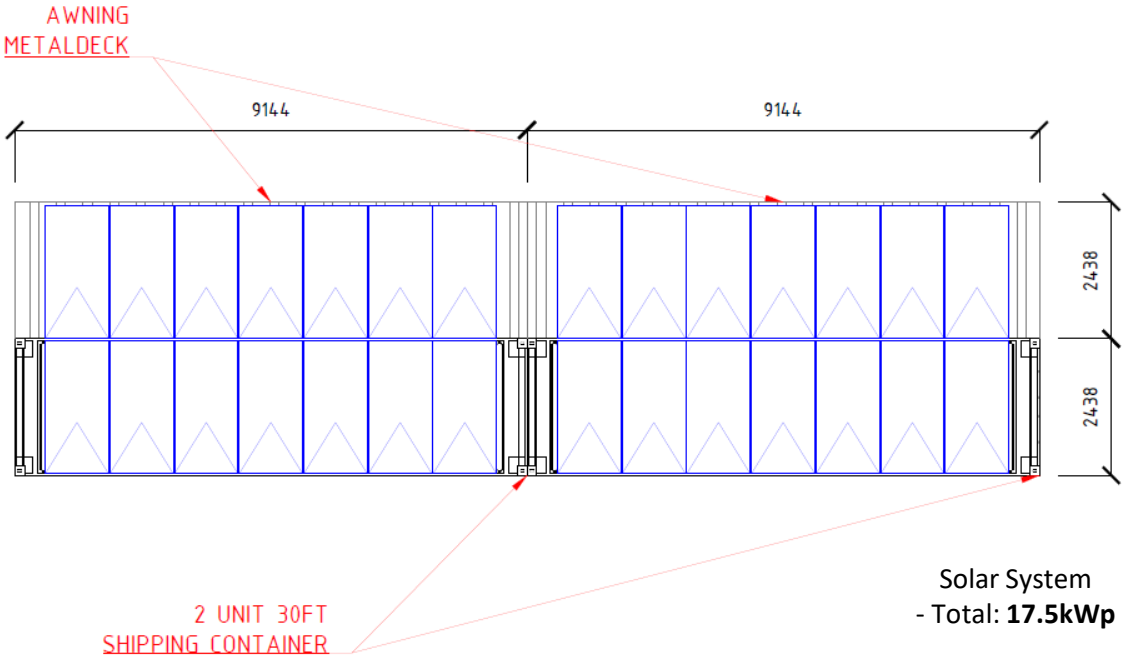

Solar System
- Total: **17.5kWp**



MegaBatt (15.36kWh)



Site Office